


PRODUCT NAME: Arbor 1-Light

ITEM NUMBER: 53502

Please consult your electrician for hanging fixture and wiring.

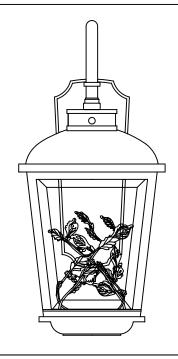

To prevent water intrusion, caulk around back-plate where fixture meets the wall using outdoor silicone sealant. Leave a small gap at the bottom to allow moisture to exit.

"This fixture is designed to dim with an Electronic Low Voltage dimmer. Dimming levels will vary by dimmer.

Below is a List of Recommended Dimmers:

- \* Lutron MACL-153M
- \* Leviton IPL06-10Z

Due to inrush current, wattage should not exceed 150 Watts of product for a 600 Watt dimmer."

## 8.5W AC LED

PRODUCTS ARE NOT INENDED FOR COMMERCIAL USE.

MADE IN CHINA Page 1 of (2)




PRODUCT NAME: Arbor 1-Light

ITEM NUMBER: 53502

CAUTION:Before starting the installation, disconnect the power by turning off the circuit breaker or by removing the fuse at the fuse box.

Carefully unpack and identify all parts before assembly

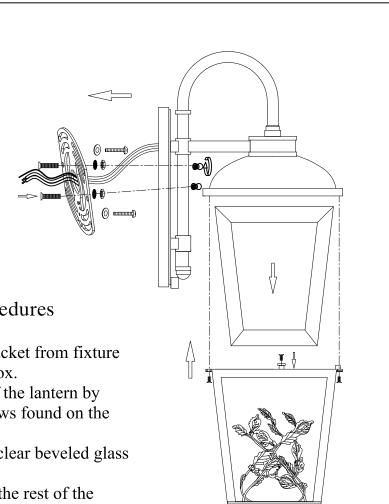

- 1. Remove mounting bracket from fixture and install to electrical box.
- 2. Release the bottom of the lantern by unscrewing the four screws found on the hood's corners.
- 3. Install three panes of clear beveled glass to cage of lantern.
- 4. Re-attach the cage to the rest of the lantern.
- 5. Wire fixture to wires in outlet box. Copper wire is for Ground.
- 6. Attach fixture to mounting bracket and tighten screws on the side so fixture meets wall.

(For outdoor use, caulk fixture with silicone sealant)